


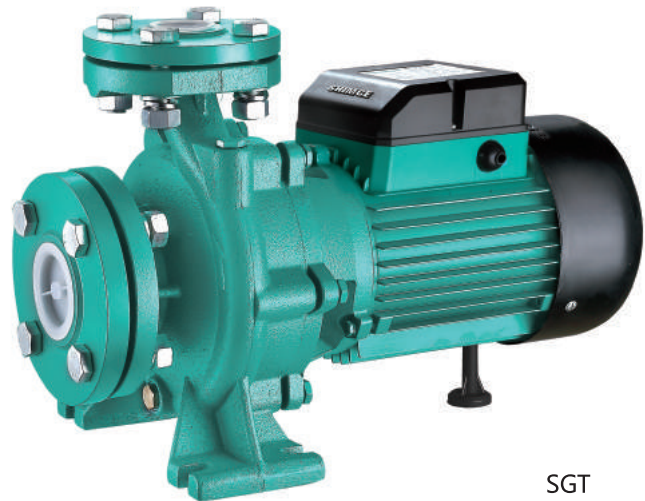

SGT

Application Limits

Advantages & Features

- ◉ Suction head up to 8m
 - ◉ Liquid temperature up to +60°C
 - ◉ Ambient temperature up to +40°C
 - ◉ Max. Working pressure: 6bar
 - ◉ Voltage fluctuation should not exceed 10% of rated value.
 - ◉ pH: 6.5 to 8.5
- ◉ Standard flange centrifugal pump
 - ◉ Large flow, high efficiency

Performance Data

Model	Power		Max. Flow (m³/h)	Max. Head (m)	Head Range (m)	Max. Suction (m)	Packing Dim. (L×W×H) mm	G.W. (kg)	20'Loading Qty. (pcs)
	Three-Phase	kW HP							
SGT32-160/1.5		1.5 2	21	21	10~21	8	490×285×355	35	616
SGT32-160/2.2		2.2 3	21	28	14~28	8	520×285×355	40	568
SGT32-160/3		3 4	21	35	16~35	8	595×275×355	43	556
SGT32-200/4		4 5.5	21	45	7~45	8	600×315×405	57	371
SGT32-200/5.5		5.5 7.5	21	58	8~58	8	660×315×405	68.5	336
SGT32-200/7.5		7.5 10	21	70	10~70	8	660×315×405	79	336
SGT40-125/1.5		1.5 2	24	18	7~18	8	490×255×315	34	774
SGT40-125/2.2		2.2 3	24	24	9~24	8	520×255×315	40	738
SGT40-160/3		3 4	30	28	6~28	8	625×275×355	48	480
SGT40-160/4		4 5.5	30	36	17~36	8	645×275×355	56	456
SGT40-200/5.5		5.5 7.5	39	42	10~42	8	655×300×415	66	350
SGT40-200/7.5		7.5 10	39	52	11~52	8	735×300×415	83.5	324
SGT80-125A/7.5		7.5 10	120	28	10~28	8			



JET-A



JET100P



JET-L



JET300/400

Application Limits

Advantages & Features

- ◉ Suction head up to 9m
 - ◉ Liquid temperature up to +40°C
 - ◉ Ambient temperature up to +40°C
 - ◉ Max. Working pressure: 5bar
 - ◉ Voltage fluctuation should not exceed 10% of rated value.
 - ◉ pH: 6.5 to 8.5
- ◉ The JET type self-priming pump
 - ◉ High suction, with short time
 - ◉ Different impeller material configuration

Performance Data

Model		Power		Max. Flow (m³/h)	Max. Head (m)	Head Range (m)	Max. Suction (m)	Packing Dim. (L×W×H) mm	G.W. (kg)	20'Loading Qty. (pcs)
Single-Phase	Three-Phase	kW	HP							
JET80L	-	0.55	0.75	3.3	42	5~42	9	475×190×220	18	1480
JET100P	-	0.75	1	4.2	46	6~46	9	475×190×220	17.5	1480
JET100L	-	0.75	1	4.2	46	5.5~46	9	475×190×220	18.5	1480
JET300	-	0.55	0.75	2.7	45	3~42	9	470×200×205	17	1606
JET400	-	0.75	1	3.9	45	7~45	9	470×200×205	17.5	1606
JET505B	-	1.1	1.5	1.9	80	1.5~80	30	415×250×375	25.5	760
JET550A	-	0.55	0.75	4.5	32	7~32	9	465×205×220	13.5	1420
JET750A	-	0.75	1	4.5	40	7~40	9	465×205×220	14.5	1420
JET1100A	-	1.1	1.5	4.5	48	6~48	9	465×205×220	16	1420
JET1500A	JETS1500A	1.5	2	5.4	55	4.5~55	9	555×240×265	25/23.5	918
JET1800A	JETS1800A	1.8	2.5	6	62	3.5~62	9	555×240×265	26/24.5	918